


How to modify the water detection time Aqua-Protec system

Context

The Aqua-Protec system must detect a backflow for 5 seconds for the system to begin inflating the Aqua-Protec balloon to block it. The value of 5 seconds is the default value for all Aqua-Protec systems. It is possible to modify this delay to better adapt to the environment where the system is present.

Buttons identifications

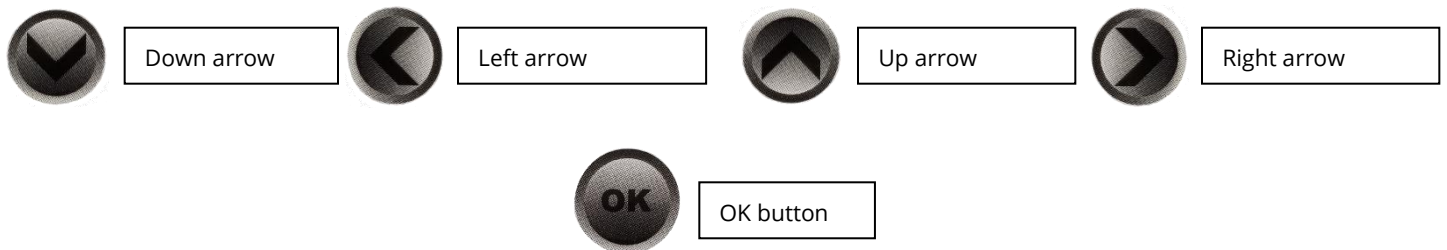

Procedure

1. Press the **"ok"** button twice to access the main menu
2. Press on the **down** arrow until you see technician appear
3. Enter your technician number to enter the Aqua-Protec settings
4. Press on the **right** arrow to confirm your choice
5. From the technician menu, press on the down arrow until you are aligned with **"WatDetectionTime"**
6. Press on the right arrow to confirm selection
7. You will see the following numbers in this format: 00:00
 - The first two digits represent the number of seconds
 - The second two digits represent the number of milliseconds
8. The default value is 5 seconds (05:00)
9. Set the desired value
 - Left and right arrow to change from one number to the other
 - Up and down to increment and decrement the value of the number
10. Press on the **right** arrow until you are at the previous menu
11. Press **4 times** on the **left** arrow until it brings you back to the home screen.
12. The system should indicate **"Aqua-Protec, Date & time, Standby, Sewer free"**